


Entanglement dimension D [mm]	Recommended assembly length L [m]	Entanglement weight Flatwrap Standard [kg]				Entanglement weight Flatwrap Premium [kg]			
		B	T	US	UM	B	T	US	UM
400	15.2	11.1	12.2	14.8	15.4	13.2	14.6	17.7	18.5
450	15.3	11	12.1	14.6	15.2	13.1	14.5	17.6	18.3
500	15	10.6	11.6	14	14.6	12.7	13.9	16.9	17.7
700	15.4	10.2	11.2	13.7	14.4	12.3	13.6	16.7	17.5
900	15.3	9.8	10.8	13.3	13.9	11.9	13.2	16.3	17

## AVAILABLE TYPES OF BLADES

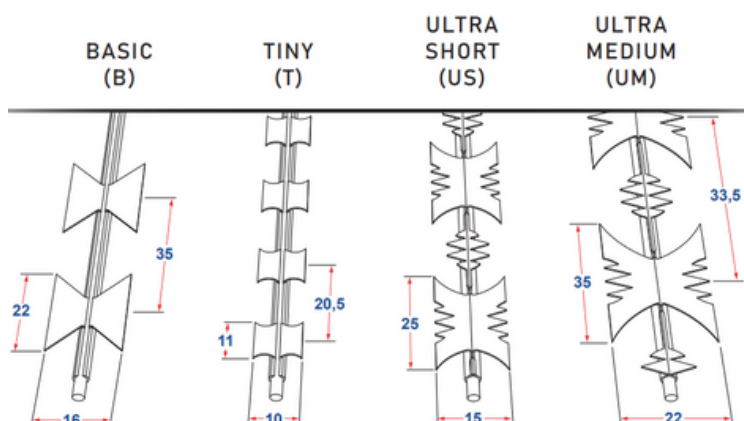

## WIRE SPECIFICATIONS

- galvanized spring wire
- Ø2,5 mm wire diameter
- DX52 Z100 material (galvanized min. 100 g/m<sup>2</sup>)
- tensile strength of Rm 1650 - 1750 MPa

## TAPE SPECIFICATIONS

- galvanized steel tape
- tape thickness 0.5 mm
- DX52 Z270 material

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

[www.protectorfence.pl](http://www.protectorfence.pl)

Contact:  
+48 791 701 771  
handlowy@protectorfence.pl  
biuro@protectorfence.pl

Sales Office:  
15 Grażyny St.  
Suite 220 / 2'nd Floor  
02-548 Warsaw, Poland