


Entanglement dimension D [mm]	Recommended assembly length L [m]	Entanglement weight Flatwrap Standard [kg]				Entanglement weight Flatwrap Premium [kg]			
		B	T	US	UM	B	T	US	UM
400	15.2	11.1	12.2	14.8	15.4	13.2	14.6	17.7	18.5
450	15.3	11	12.1	14.6	15.2	13.1	14.5	17.6	18.3
500	15	10.6	11.6	14	14.6	12.7	13.9	16.9	17.7
700	15.4	10.2	11.2	13.7	14.4	12.3	13.6	16.7	17.5
900	15.3	9.8	10.8	13.3	13.9	11.9	13.2	16.3	17

AVAILABLE TYPES OF BLADES

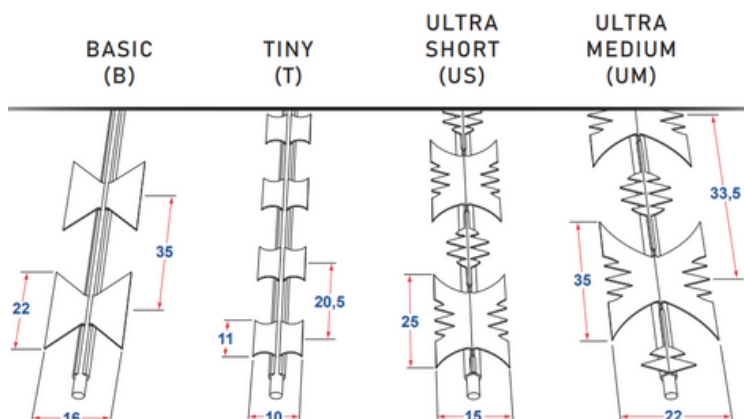

WIRE SPECIFICATIONS

- stainless steel wire
- Ø2,5 mm wire diameter
- AISI 304 material
- tensile strength of Rm 900 MPa

TAPE SPECIFICATIONS

- stainless steel tape
- tape thickness 0.4 mm
- AISI 304 material

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

www.protectorfence.pl

Contact:
+48 791 701 771
handlowy@protectorfence.pl
biuro@protectorfence.pl

Sales Office:
15 Grażyny St.
Suite 220 / 2'nd Floor
02-548 Warsaw, Poland