


Entanglement dimension D [mm]	Recommended assembly length L [m]	Number of turns in the entanglement Z [pcs]	Entanglement weight [kg]			
			B	T	US	UM
400	7 - 8	54	4.9	5.4	6.6	7.3
450	7 - 8		5.6	6.1	7.3	8.3
500	7 - 8		6.1	6.7	8.2	9.1
550	8 - 9		6.7	7.4	8.9	10
600	8 - 9		7.3	8	9.7	10.8
650	8 - 9		7.9	8.7	10.4	11.8
730	9 - 10		8.9	9.8	11.8	13.1
850	9 - 10		10.3	11.3	13.7	15.3
980	10 - 11		11.9	13.1	15.7	17.8

AVAILABLE TYPES OF BLADES

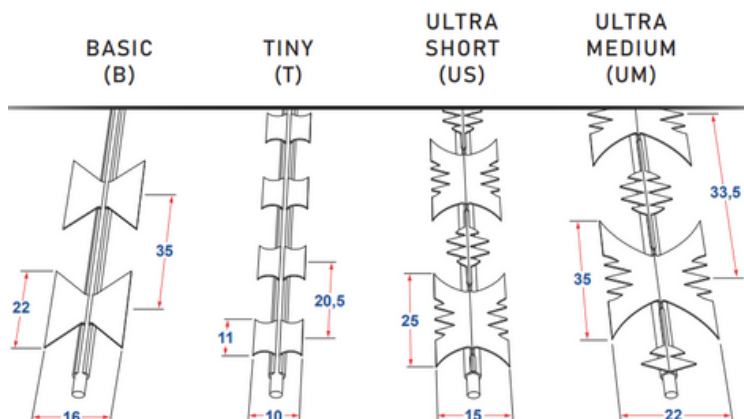

WIRE SPECIFICATIONS

- galvanized spring wire
- Ø2,5 mm wire diameter
- DX52 Z100 material (galvanized min. 100 g/m²)
- tensile strength of Rm 1650 - 1750 MPa

TAPE SPECIFICATIONS

- galvanized steel tape
- tape thickness 0.5 mm
- DX52 Z270 material

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

www.protectorfence.pl

Contact:
+48 791 701 771
handlowy@protectorfence.pl
biuro@protectorfence.pl

Sales Office:
15 Grażyny St.
Suite 220 / 2nd Floor
02-548 Warsaw, Poland