


Entanglement dimension D [mm]	Recommended assembly length L [m]	Number of turns in the entanglement Z [pcs]	Entanglement weight [kg]			
			B	T	US	UM
400	7 - 8	54	4.9	5.4	6.6	7.3
450	7 - 8		5.6	6.1	7.3	8.3
500	7 - 8		6.1	6.7	8.2	9.1
550	8 - 9		6.7	7.4	8.9	10
600	8 - 9		7.3	8	9.7	10.8
650	8 - 9		7.9	8.7	10.4	11.8
730	9 - 10		8.9	9.8	11.8	13.1
850	9 - 10		10.3	11.3	13.7	15.3
980	10 - 11		11.9	13.1	15.7	17.8

## AVAILABLE TYPES OF BLADES

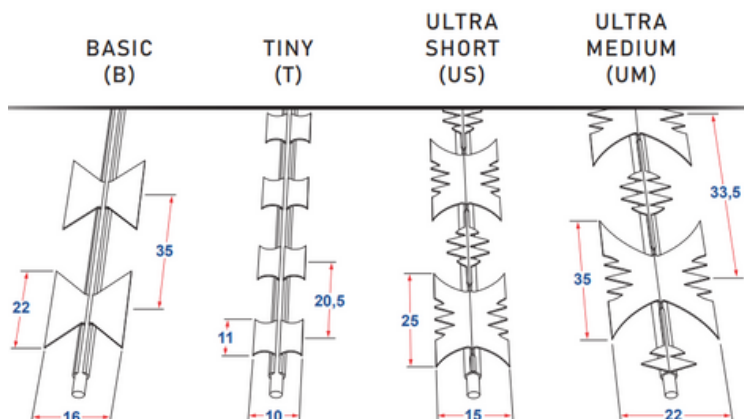

## WIRE SPECIFICATIONS

- stainless steel wire
- Ø2,5 mm wire diameter
- AISI 304 material
- tensile strength of Rm 900 MPa

## TAPE SPECIFICATIONS

- stainless steel tape
- tape thickness 0.4 mm
- AISI 304 material

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland