


Entanglement dimension D [mm]	Recommended assembly length L [m]	Number of turns in the entanglement Z [pcs]	Number of connectors per turn C [pcs]	Entanglement weight [kg]			
				B	T	US	UM
400	7 - 8	54	3	5.2	5.7	6.9	7.6
450	7 - 8		3	5.8	6.4	7.6	8.6
500	7 - 8		3	6.4	7	8.5	9.4
550	8 - 9		3	7	7.7	9.2	10.3
600	8 - 9		3	7.6	8.3	10	11.1
650	8 - 9		5	8.4	9.2	10.9	12.3
730	9 - 10		5	9.4	10.3	12.3	13.6
850	9 - 10		5	10.7	11.8	14.2	15.8
980	10 - 11		7	12.6	13.8	16.4	18.5

AVAILABLE TYPES OF BLADES

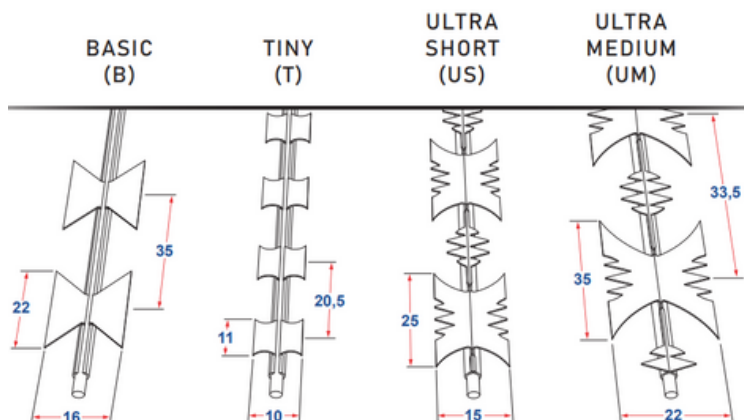

WIRE SPECIFICATIONS

- galvanized spring wire
- Ø2,5 mm wire diameter
- DX52 Z100 material (galvanized min. 100 g/m²)
- tensile strength of Rm 1650 - 1750 MPa

TAPE SPECIFICATIONS

- galvanized steel tape
- tape thickness 0.5 mm
- DX52 Z270 material

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

www.protectorfence.pl

Contact:
+48 791 701 771
handlowy@protectorfence.pl
biuro@protectorfence.pl

Sales Office:
15 Grażyny St.
Suite 220 / 2nd Floor
02-548 Warsaw, Poland