


Coil diameter D [mm]	No. of turns Z [pcs]	Length of razor wire L [m]	Wire weight [kg]			
			B	T	US	UM
800	40	100	6,9	7,8	9,7	10,2
	60	150	10,3	11,7	14,6	15,3
	80	200	13,7	15,6	19,4	20,4
	100	250	17,1	19,5	24,3	25,5
	120	300	20,6	23,4	29,2	30,6

AVAILABLE TYPES OF BLADES

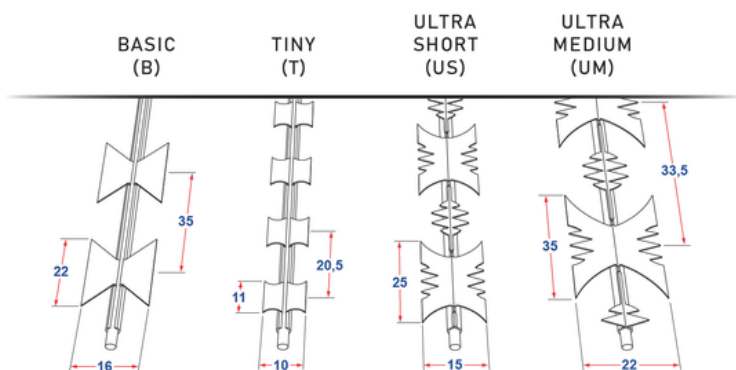

WIRE SPECIFICATIONS

- galvanized soft wire
- Ø2,5 mm wire diameter
- DX52 Z100 material (galvanized min. 100 g/m²)
- tensile strength of Rm 380 - 550 MPa

TAPE SPECIFICATIONS

- galvanized steel tape
- tape thickness 0.5 mm
- DX52 Z270 material (galvanized min. 270 g/m²)

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

www.protectorfence.pl

Contact:
+48 791 701 771
handlowy@protectorfence.pl
biuro@protectorfence.pl

Sales Office:
15 Grażyny St.
Suite 220 / 2'nd Floor
02-548 Warsaw, Poland