



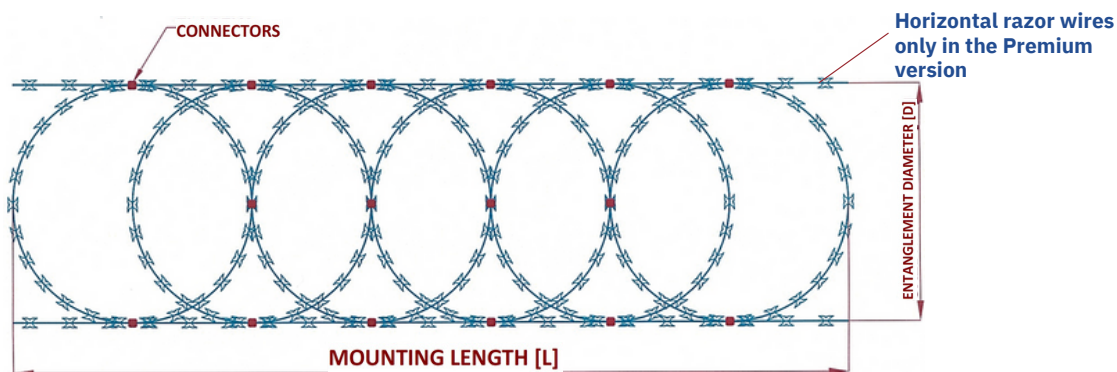

Entanglement dimension D [mm]	Recommended assembly length L [m]	Entanglement weight Flatwrap Standard [kg]				Entanglement weight Flatwrap Premium [kg]			
		B	T	US	UM	B	T	US	UM
400	15,2	11,1	12,2	14,8	15,4	13,2	14,6	17,7	18,5
450	15,3	11,0	12,1	14,6	15,2	13,1	14,5	17,6	18,3
500	15,0	10,6	11,6	14,0	14,6	12,7	13,9	16,9	17,7
700	15,4	10,2	11,2	13,7	14,4	12,3	13,6	16,7	17,5
900	15,3	9,8	10,8	13,3	13,9	11,9	13,2	16,3	17,0

AVAILABLE TYPES OF BLADES

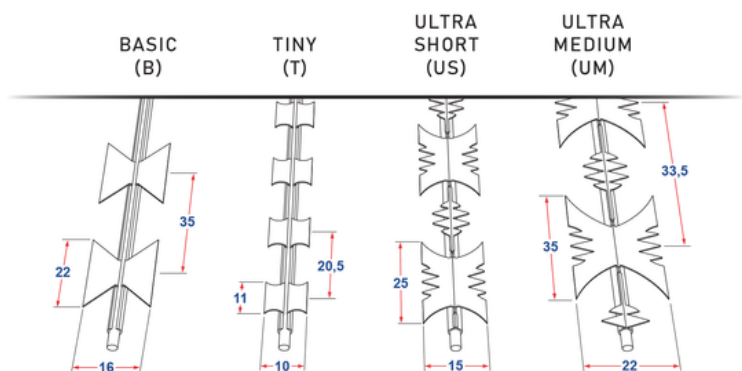

WIRE SPECIFICATIONS

- stainless steel wire
- Ø2,5 mm wire diameter
- tensile strength of Rm 900 MPa
- AISI 304 material
- optional AISI 316 material

TAPE SPECIFICATIONS

- stainless steel tape
- tape thickness 0.4 mm
- AISI 304 material
- optional AISI 316 material

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

www.protectorfence.pl

Contact:
+48 791 701 771
handlowy@protectorfence.pl
biuro@protectorfence.pl

Sales Office:
15 Grażyny St.
Suite 220 / 2'nd Floor
02-548 Warsaw, Poland