



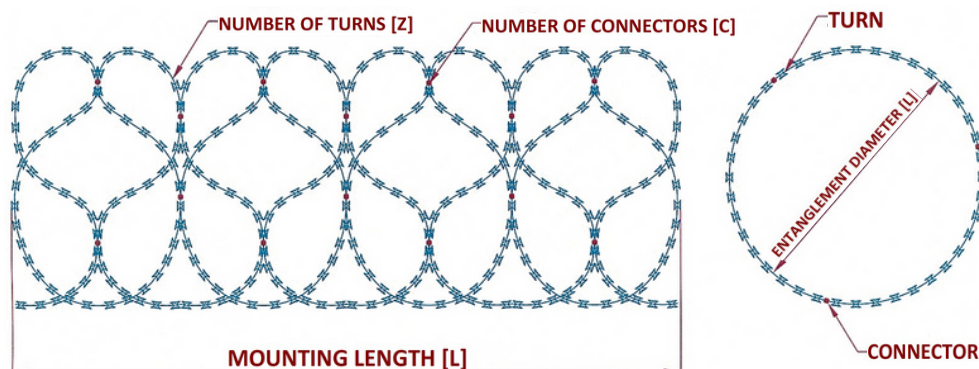

Entanglement dimension D [mm]	Recommended assembly length L [m]	Number of turns in the entanglement Z [pcs]	Number of connectors per turn C [pcs]	Entanglement weight [kg]			
				B	T	US	UM
400	7 – 8	54	3	5,2	5,7	6,9	7,6
450	7 – 8		3	5,8	6,4	7,6	8,6
500	7 – 8		3	6,4	7,0	8,5	9,4
550	8 – 9		3	7,0	7,7	9,2	10,3
600	8 – 9		3	7,6	8,3	10,0	11,1
650	8 – 9		5	8,4	9,2	10,9	12,3
730	9 – 10		5	9,4	10,3	12,3	13,6
850	9 – 10		5	10,7	11,8	14,2	15,8
980	10 – 11		7	12,6	13,8	16,4	18,5

AVAILABLE TYPES OF BLADES

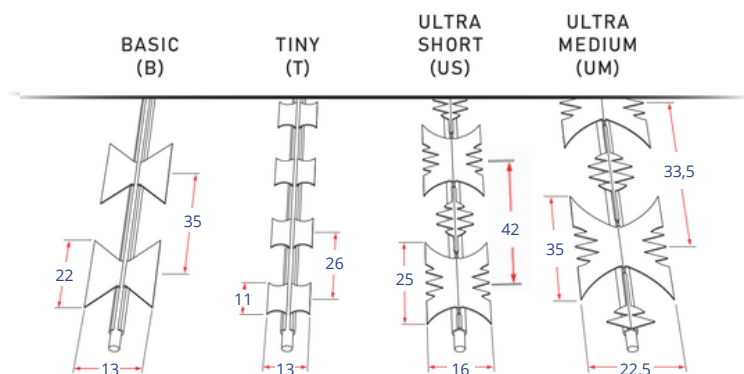

WIRE SPECIFICATIONS

- Galvanized spring wire (zinc coating min. 150 g/m²)
- Wire diameter Ø2.5 mm
- Standard PN-EN 10270-1 SM
- Tensile strength Rm 1650 - 1750 MPa
- Also available in stainless steel or acid-resistant steel

TAPE SPECIFICATIONS

- Strip thickness 0.5 mm
- Material DX51D Z275 (zinc coating min. 275 g/m²)
- Also available in stainless steel or acid-resistant steel

Protector Fence Sp. z o. o. 8 Zagórki St. Hall 5.1, 77-300 Człuchów, Poland

www.protectorfence.pl

Contact:
+48 791 701 771
handlowy@protectorfence.pl
biuro@protectorfence.pl

Sales Office:
15 Grażyny St.
Suite 220 / 2'nd Floor
02-548 Warsaw, Poland